




# Toshiba NB250-108 HDD Replacement

Replacing the hard drive

Written By: Guenter Hildebrandt

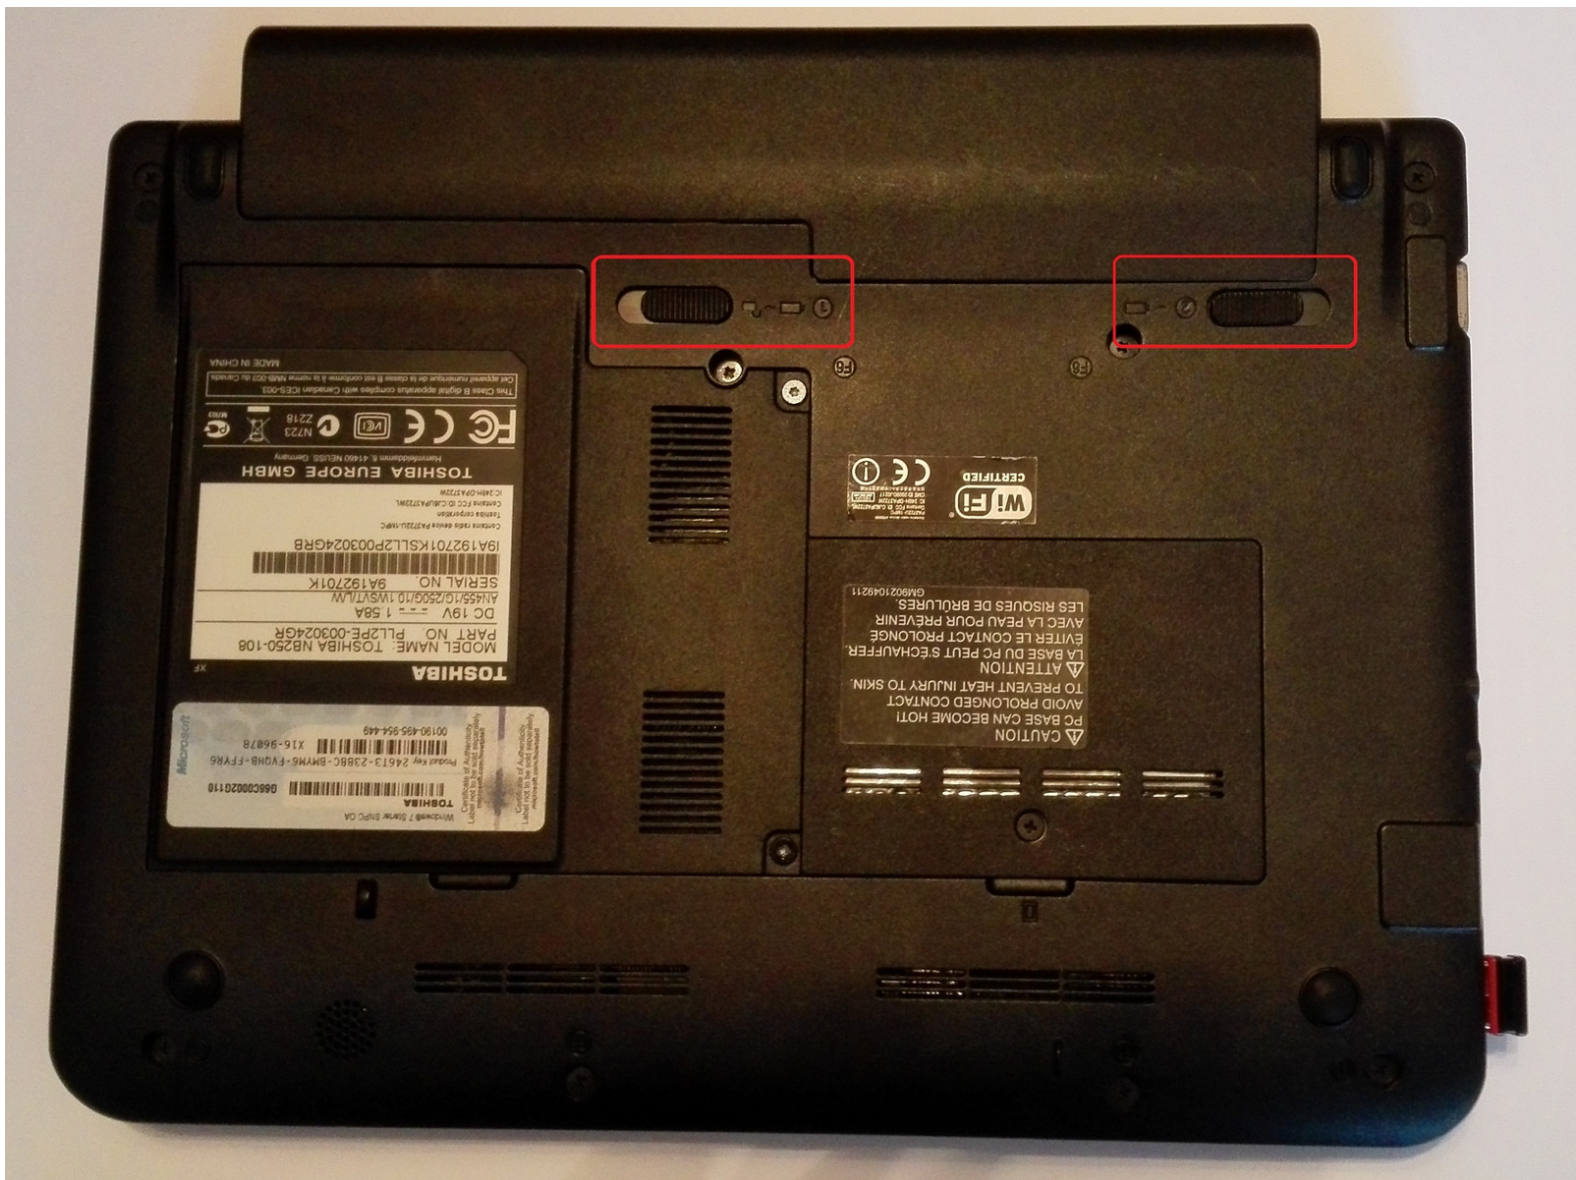

## INTRODUCTION

Replacing the hard drive



---



### TOOLS:

- [T6 Torx screwdriver](#) (1)
-

## Step 1 — Remove battery

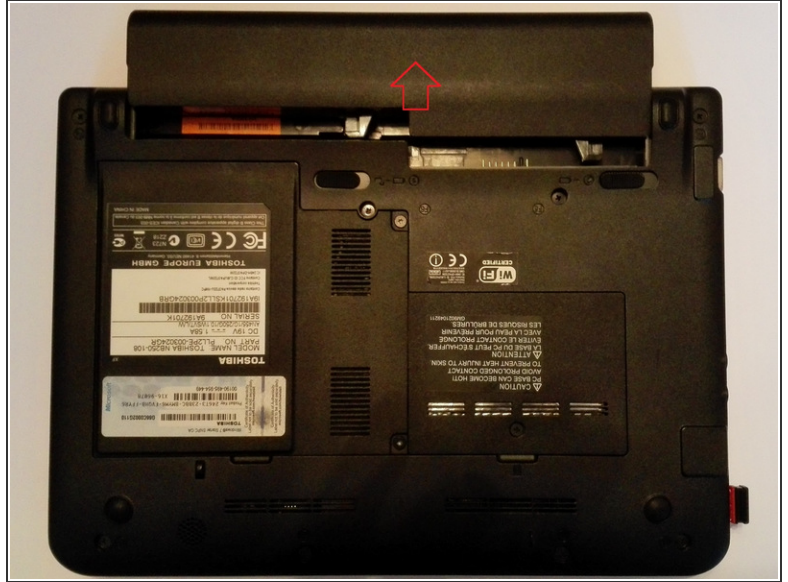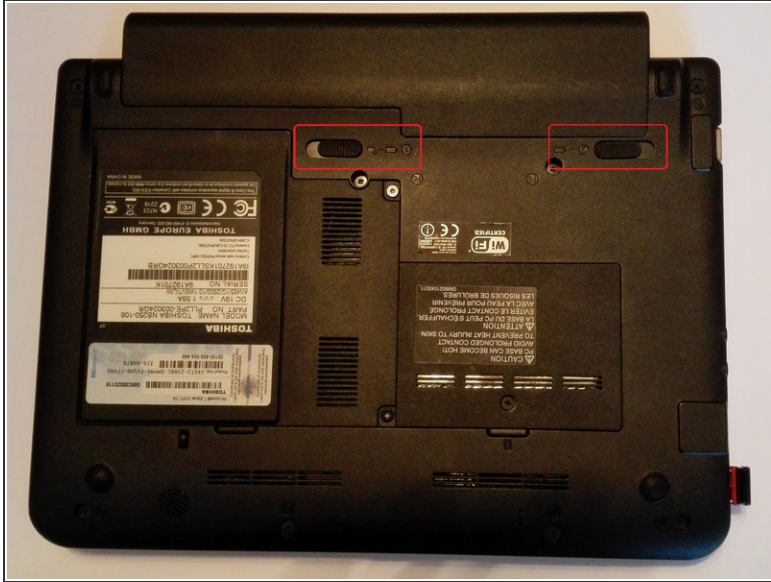

- Save your work.
- Turn off the computer. The LED power indicator is off.
- ⚠ Disconnect all cables connected to the computer and cable equipment.
- Close the display and place the computer upside down as shown in the picture down.
- Slide the safety lock (on the left) to the unlock position (to the left) to enable sharing.
- Slide the battery release latch (right) to the right and hold it in place in order to release the battery pack, and remove the battery pack to the back of the computer.



## Step 2 — Remove hard drive



- Remove it now the two screws (Torx T6) of the cover disk and WLAN card. Remove the cover by lifting and slight pull on the right side.
- To remove the disk, push it with both hands at the same time gently upwards towards battery. Now they can be easily removed from the shaft.
- Put the removed hard disk securely on the work surface.

Arbeite die Schritte in umgekehrter Reihenfolge ab, um dein Gerät wieder zusammenzubauen.

This document was last generated on 2017-07-28 01:52:10 PM.